



Coaxial Isolator, 570-710MHz N-Type Connector, 1-20 Watts RADI-570-710M-N3-1WR

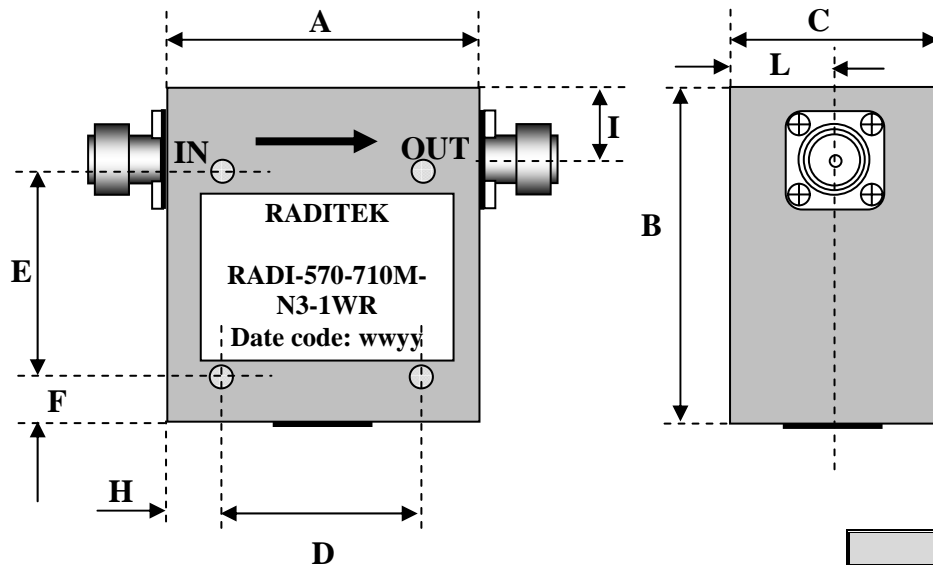

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

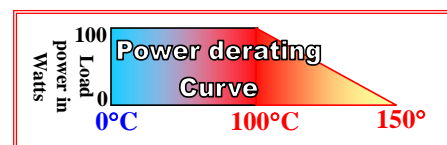

Direction of RF:

R	Default	
L		

Units: mm
Not to scale

Order Examples: **RADI-570-710M-N3-1WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	64.8	73.4	25.5	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	570-710	Full	0.3 0.3	23 20	1.10 1.20	20	1, 10, 20	+25 -20 to +80	N-Type