



Coaxial Circulator or Isolator, 1200-1400MHz 7/16 Connector, 2.4 kilowatt RADC-1200-1400M-7/16(f)-2.4kWR

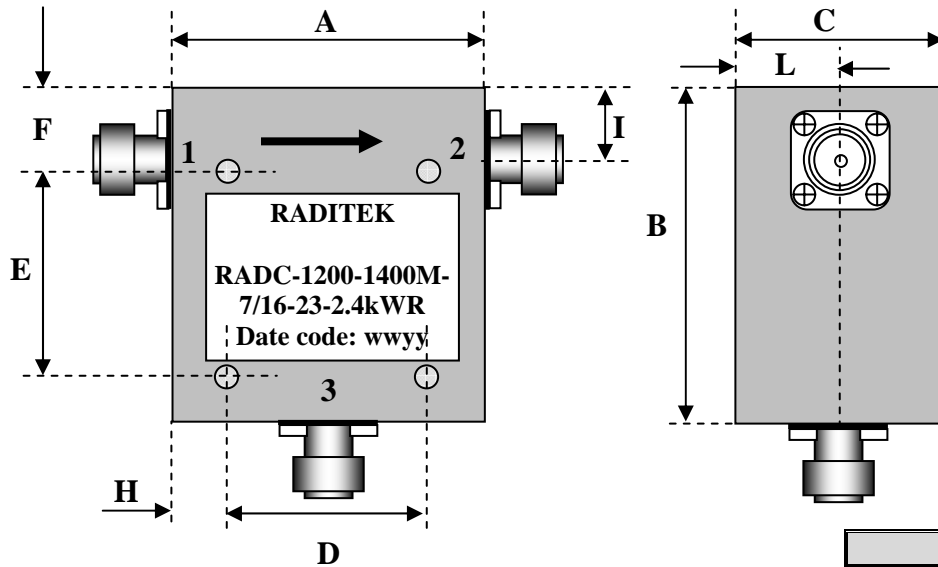

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

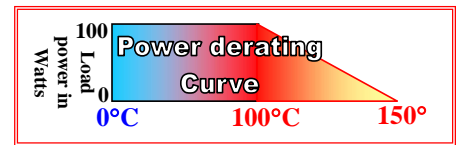

Direction of RF:

R	Default	
L		

Units: mm
Not to scale

Order Examples: RADC-1200-1400M-7/16(f)-23.225WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	200	200	70	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	1200-1400	Full	tba	20	tba	2.4	24	tba	7/16